



ALUMA-FORM®

FDA25 Series

2-wire, 4-wire

Material Specifications


Pole Gain

- 65-45-12 Ductile Iron, hot-dipped galvanized per ASTM A153 (12" mounting centers)
- 2 guy attachment positions - rated at 30,000# per hole
- Accepts 3/4" pole mounting hardware
- Can be banded using the Aluma-Form Bolt-A-Band™ banding system


Fiberglass Tube

- 3-5/8" X 4-5/8" Super-Smooth™, proprietary veiled gray polyester tube with added ultraviolet protection

FIBERGLASS DEAD-END ARMS

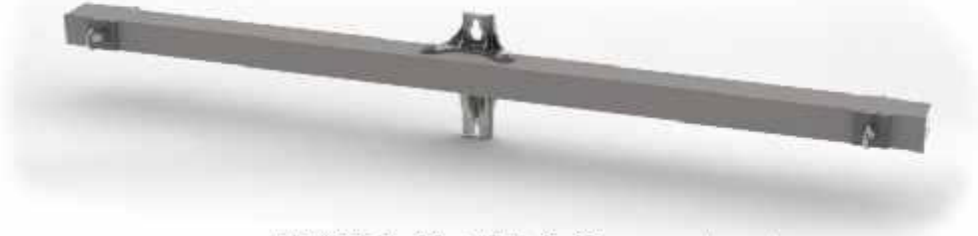

FDA25-2-96-EB-DG (Shown above)

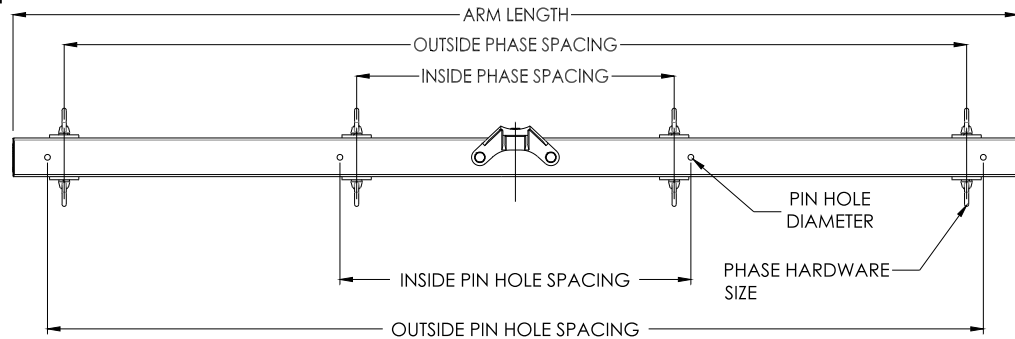

Aluma-Form Catalog Name	Balanced Horizontal Load Capacity	Length	Pin Hole Information			Phase Information				Deflection per 1000 lbs	Weight
			Pin Hole Diameter	Inside Spacing	Outside Spacing	# of Phases	Phase Hardware Size	Inside Phase Spacing	Outside Phase Spacing		
FDA25-2-60-EB-DG	10000	60	11/16	34	52	2	5/8"	-	48	0.18	36.1
FDA25-2-96-EB-DG	10000	96	11/16	34	88	2	5/8"	-	84	0.38	42.84
FDA25-4-96-EB-DG	7500	96	11/16	34	88	4	5/8"	30	84	0.62	51.3
FDA25-2-120-EB-DG	7500	120	11/16	42	112	2	5/8"	-	108	0.71	47.3
FDA25-4-120-EB-DG	6000	120	11/16	42	112	4	5/8"	38	108	0.98	55.7
FDA25-2-144-EB-DG	6000	144	11/16	-	136	2	5/8"	-	132	1.25	51.8
FDA25-4-144-EB-DG	4200	144	11/16	60	136	4	5/8"	68	132	1.76	60.2

Notes:

1. Custom drilling available, contact factory or local sales representative.
2. Standard hardware includes 5/8" Eye Nuts, bolts, & lock washers.
3. Use a "-D" option for pole gain without guying option
4. For eye bolts on one side of arm change "EB" to "SB"