



FIBERGLASS TANGENT ARMS

FTA20L & FTA20 Series

Material Specifications

Pole Gain



• 6061-T6 Aluminum Pole Gain with 8", 10", & 12" mounting centers

• Accepts 5/8" mounting hardware

• Can be banded using the Aluma-Form Bolt-A-Band™ banding system

Fiberglass Tube

• 3-5/8" X 4-5/8" Super-Smooth™, proprietary veiled gray polyester tube with added ultraviolet protection

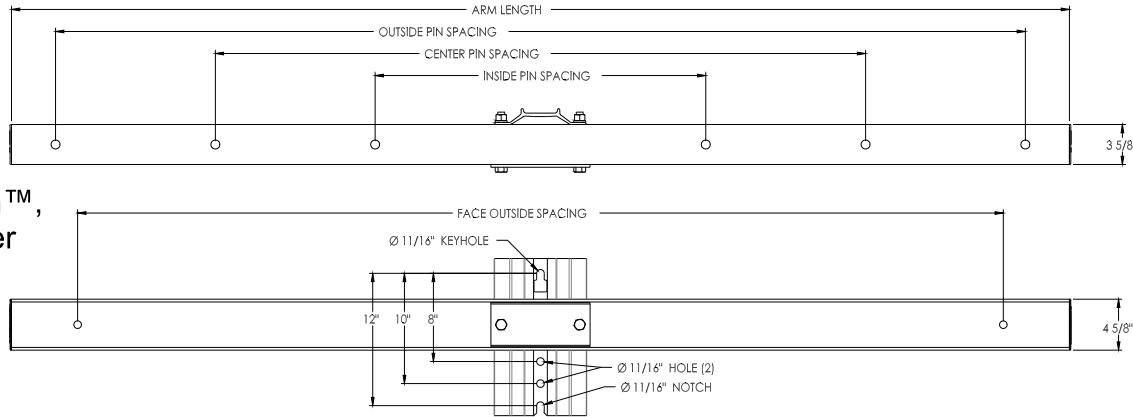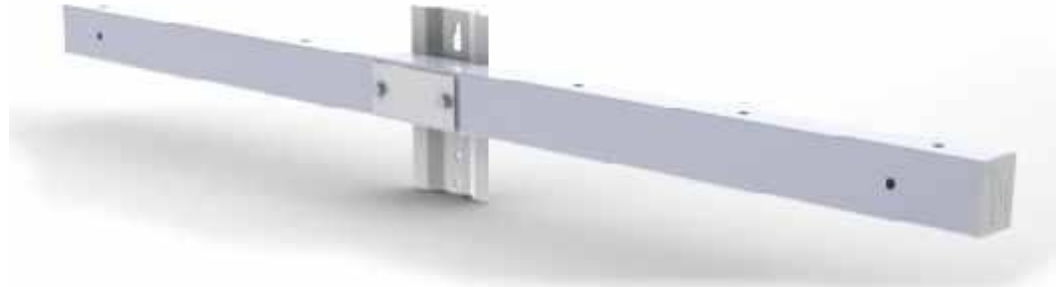

Catalog Name	Balanced Vertical Load per side	Length	Face Hole Diameter	Face Hole Spacing	Insulator Pin Positions	Phase hole diameter (Top)	Inside	Center	Outside	Deflection per 1000 lbs	Weight
FTA20L-4-60-A	6200	60	11/16"	48	4	11/16"	23	-	52	0.3	17.2
FTA20L-4-96-A	6100	96	11/16"	84	4	11/16"	30	-	88	0.59	23.6
FTA20L-6-96-A	6100	96	11/16"	84	6	11/16"	30	59	88	0.59	23.6
FTA20L-6-120-A	5000	120	11/16"	108	6	11/16"	38	75	112	1.13	28.2
FTA20L-4-144-A	3800	144	11/16"	132	4	11/16"	76	-	136	2.21	32.2
FTA20-4-60-A	6500	60	11/16"	48	4	11/16"	23	-	52	0.24	17.8
FTA20-4-96-A	6400	96	11/16"	84	4	11/16"	30	-	88	0.43	24.5
FTA20-6-96-A	6400	96	11/16"	84	6	11/16"	30	59	88	0.43	24.5
FTA20-6-120-A	5400	120	11/16"	108	6	11/16"	38	75	112	0.77	28.9
FTA20-4-144-A	4200	144	11/16"	132	4	11/16"	76	-	136	1.2	33.5

Notes:

1. Custom drilling available, contact factory or local sales representative.