


336.4 Thru 1272 SERIES STIRRUP CONNECTORS

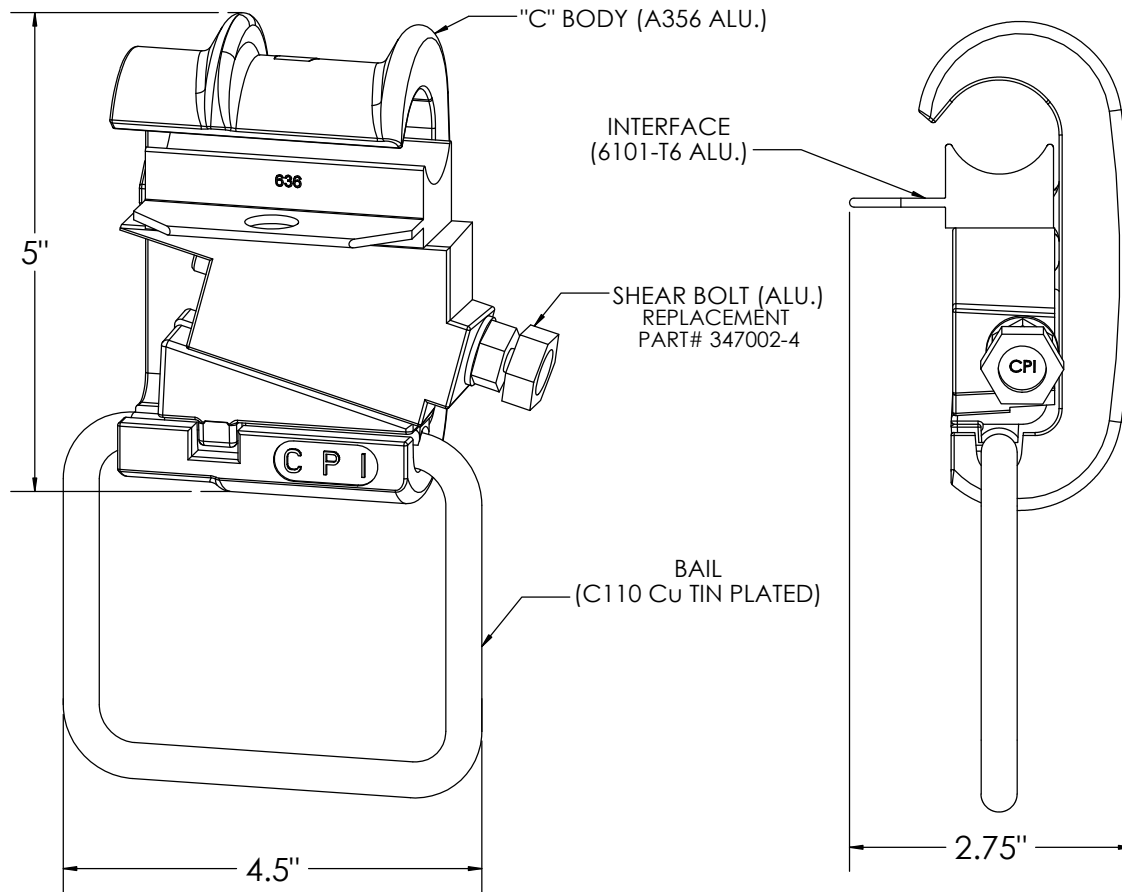

2/0 BAIL AMPACITY: 700 AMPS

4/0 BAIL AMPACITY: 850 AMPS

Main Conductor		Bail Size	Catalog #
Description	Dia. Range		
226.8 ACSR 30/7, 336.4, 397.5 AAC, 397.5 ACSR 18/1	.642" - .743"	2/0	336875
		4/0	336780
450, 397.5 ACSR, 477, 500, 556.5 AAC, 556.5 ACSR 18/1	.769" - .883"	2/0	556580
		4/0	556595
477 ACSR 26/7 30/7, 556.5, 600, 636, 605, 715 AAC	.856" - .991"	2/0	636556
		4/0	636556-1
636 ACSR, 750, 666.6, 715, 795, 900	.990" - 1.108"	2/0	795500
		4/0	795405
715.5 ACSR, 795 ACSR, 900, 954, 1113 AAC, 1000	1.036" - 1.162"	2/0	103228
		4/0	103228-1
954, 1113, 900 ACSR, 1033.5, 1113, 1272 AAC	1.124" - 1.302"	2/0	119375
		4/0	119375-1

STANDARD PACKAGE: Full Carton: 20 Units: 11" x 11" x 11.5" Box: 44 Lbs. Half Carton: 10 Units: 11" x 11" x 7" Box: 22 Lbs.